

1000Vdc Isolation Single & Dual Output 1watt Dc-Dc Converter

FEATURES:

Small Footprint
22PIN SMD Package
High Efficiency up to 80%
Unregulated Output Types
High Power Density No External Component Required Operating
Temperature:-40°C TO +85°C Industry Standard Pinout

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified				
Part Number	Output Voltage	Output Current	Efficiency	Package Style
	Vdc	mA	% TYP	
AS1-xxS03X	3.3	303	65	X
AS1-xxS05X	5	200	70	X
AS1-xxS09X	9	112	75	X
AS1-xxS12Y	12	84	78	Y
AS1-xxS15Y	15	67	80	Y
AS1-xxD03X	±3.3	±150	65	X
AS1-xxD05X	±5	±100	70	X
AS1-xxD09X	±9	±56	75	X
AS1-xxD12Y	±12	±42	78	Y
AS1-xxD15Y	±15	±34	80	Y

Note:1."XX" Is Input Voltage:03=3.3Vdc,05=5Vdc, 09=9Vdc,12=12Vdc, 15=15Vdc.

2. Over 12Vdc,15Vdc input voltage, using the 2nd package.


3.The input voltage increases, there will be an increase in efficiency.

Input Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±10	%
Filter	Capacitor				

Output Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Short Term			1 Sec	
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	3.3V (10% To 100% F.L)		15		%
Load Regulation	5V,9V (10% To 100% F.L)			12&8.0	%
Load Regulation	12V,15V (10% To 100% F.L.)			8.5&7.0	%
Ripple & Noise	BW=DC To 20MHZ			75	mVp-p
Transient response setting time	50% load step change		350		us


General Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		100		KHz
Operating Temperature		-40		85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight	PackageX or PackageY		1.8		g
Dimensions	Package X	15.24x8.0x7.30			mm
Dimensions	Package Y	15.24x8.0x8.50			mm

1000Vdc Isolation Single & Dual Output 1watt Dc-Dc Converter

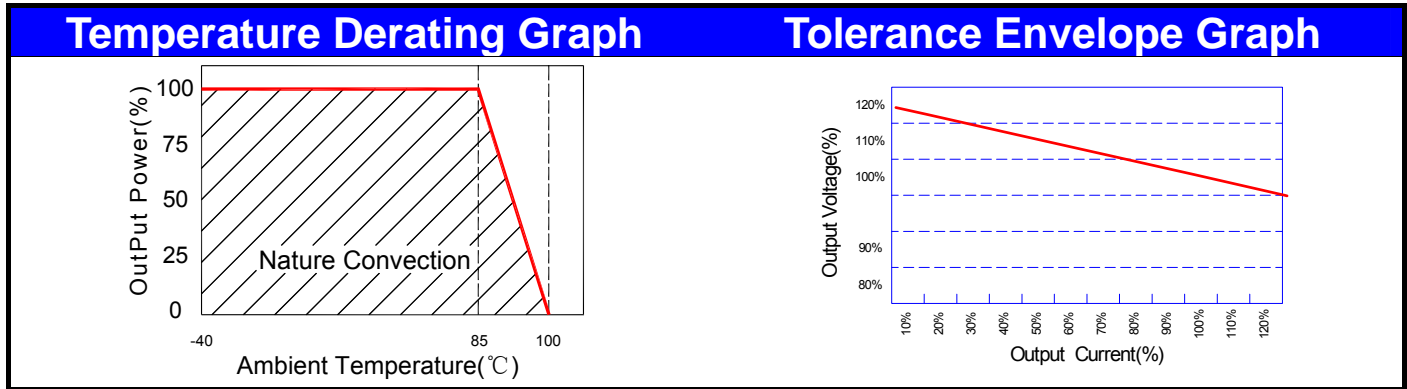

Recommended Test Circuit	Part Number
	<p>AS1 - 05 D 05 X 1 2 3 4 5</p> <p>1:Series 2:Input Voltage 3: (D) Dual (S) Single Output 4:Output voltage 5:Case X 15.24x8.0x7.30 6Case Y 15.24x8.0x8.50</p>
<p>3.3V:Cin 4.7uF,25V 3.3V:Cout 22uF,16V 5V:Cin 4.7uF,25V 5V:Cout 10uF,25V 9V:Cin 4.7uF,25V 9V:Cout 4.7uF,25V 12V:Cin 2.2uF,25V 12V:Cout 2.2uF,25V 15V:Cin 1uF,50V 15V:Cout 1uF,50V</p>	<p>3.3V:Cin 4.7uF,25V 3.3V:Cout 22uF,16V 5V:Cin 4.7uF,25V 5V:Cout 10uF,25V 9V:Cin 4.7uF,25V 9V:Cout 4.7uF,25V 12V:Cin 2.2uF,25V 12V:Cout 2.2uF,25V 15V:Cin 1uF,50V 15V:Cout 1uF,50V</p>

Markings and Dimensions

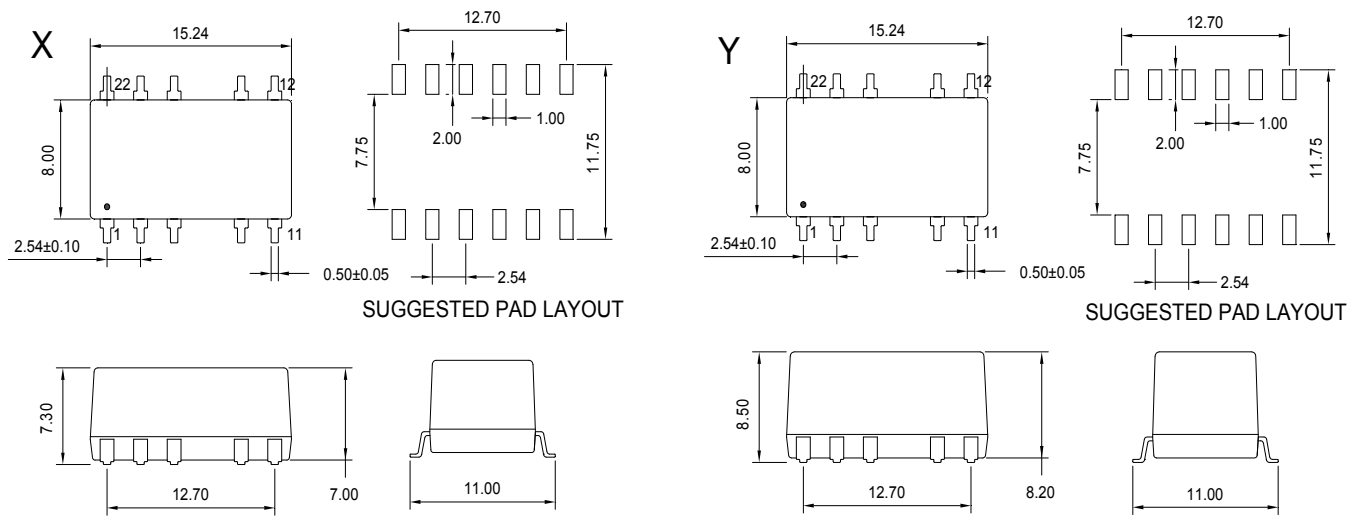

Unit: mm Unless otherwise specified, all tolerances are ±0.25

PIN Connection										
PIN	1	3	5	9	11	12	14	18	20	22
Single	-Vin	+Vin	NC	-Vout	NC	NC	+Vout	NC	NC	NC
Dual	-Vin	+Vin	NC	Com	-Vout	NC	+Vout	NC	NC	NC