

6000Vdc Isolation Dual 2W

FEATURES:

- 24PIN DIP Package
- High Efficiency up to 85%
- Unregulated Output Types
- Internal SMD Construction
- No External Component Required Industry Standard Pinout
- Operating Temperature:-40°C To +85°C

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency
	Vdc	mA	%TYP
AS2-xxD05L6	±5	±200	70
AS2-xxD09L6	±9	±111	75
AS2-xxD12L6	±12	±84	80
AS2-xxD15L6	±15	±67	80
AS2-xxD24L6	±24	±42	85

Note:1."XX" Is Input Voltage:05=5Vdc,09=9Vdc,12=12Vdc,15=15Vdc,24=24Vdc.


2. The input voltage increases, there will be an increase in efficiency

Input Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	Vo, Io Nom			±10	%
Filter	Capacitor				

Output Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Short Term			1Sec	
Ripple & Noise	BW=DC To 20MHz			100	mVp-p
Line Regulation	For 1% of Vin		1.2		%
Load Regulation	5V (20% To 100% F.L)			15	%
Load Regulation	9V,12V,15V,24V (20% To 100% F.L)			10	%
Transient response setting time	50% load step change		350		us

General Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Switching Frequency	Full load,nominal input		50		KHz
Operating Temperature		-40		+85	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight			9.5		g
Dimensions			33.02x14.73x10.41		mm

6000Vdc Isolation Dual 1W/2W Watt Dc-Dc Converter

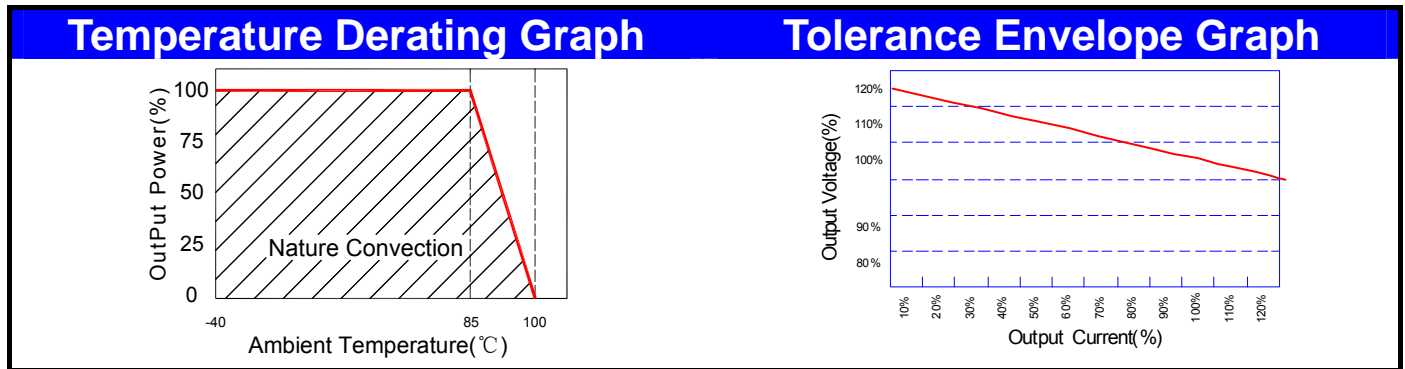

Recommended Test Circuit	Part Number
<p> 5V :Cin 4.7uF,25V 5V :Cout 10uF,25V 9V :Cin 4.7uF,25V 9V :Cout 4.7uF,25V 12V :Cin 2.2uF,25V 12V:Cout 2.2uF,25V 15V:Cin 1uF,50V 15V:Cout 1uF,50V 24V:Cin 1uF,50V 24V:Cout 1uF,50V </p>	AS2 - 05 D 05 L 6 1 2 3 4 5 6 1:Series 2W 2:Input Voltage 3:(D) DUAL Output 4:Output voltage 5:Case L 33.02x14.73x10.41 6.6000Vdc Isolation

Markings and dimensions	Packaging									
<p>Unit:mm Unless otherwise specified,all tolerances are ±0.25</p>	<table border="1"> <thead> <tr> <th colspan="3">Size(mm)</th> </tr> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>13.23</td> <td>12.30</td> <td>530</td> </tr> </tbody> </table>	Size(mm)			A	B	C	13.23	12.30	530
Size(mm)										
A	B	C								
13.23	12.30	530								

PIN Connection						
PIN	1	2	8,17	10,15	12,13	Other
DUAL	+Vin	-Vin	-Vout	Com	+Vout	NC